



UNIKOS

Indoor LED Video poster
2.5 mm pixel pitch



INDOOR




Main features

- One-person easy-handling for setup
- Vertical & Horizontal installation
- Ultra-slim and light weight
- Plug & Play
- Wi-Fi easy connection
- HDMI input output port

Thin light weight and effective.
A communication world in only 35 kg;
real-time messages and graphics editing thanks to
Viplex, an easy and intuitive app.
Just plug and PLAY!




ViplexHandy 4+

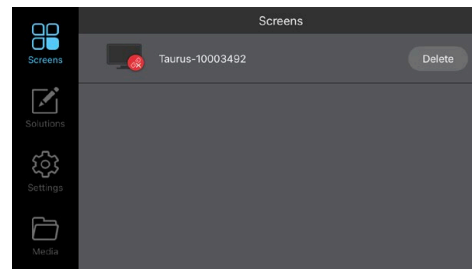

Viplex screenshot

UK-2.5 SE _ SH	
Pixel pitch (mm)	2.5mm
LED Type	SMD
Screen Resolution (pixels)	216 x 729
Splicing Option (SE / SH)	Standalone / Splicing
Signal Processing	16 bit
Refresh Rate (Hz)	3840
Luminance uniformity	≥ 97%
Colour Range	4.4 Trillion Colours
Contrast ratio	3000:1
Colour Temperature	3500K - 9500K ±500
Signal Input / Output	HDMI
Connection Type	USB / Ethernet / WiFi
Screen dimension (mm) WxH	560 x 1890
Unit dimension (mm) WxHxD	571 x 1899 x 33
Unit weight (Kg)	28
Horizontal Viewing Angle (Deg)	160
Vertical Viewing Angle (Deg)	140
Brightness (cd / m2)	1000
Power Cons. Max	400W
Power Cons. AWG	140W
IP Protection	IP40
Operating temperature (C°)	-10 to +50
MTBF	≥ 10.000 hours
Lifetime (@ 60% Brightness)	100.000 h
Power Supply	AC 110-240 V, 50/60 Hz
Certifications	CE - LVD - EMC - RoHS



Mechanical details

Horizontal Installation

